



Hillside Building Co.

SCOPE CONFIRMATION · PREPARED FOR QUOTATION

Hills renovation

24 Sample Lane, Adelaide Hills SA

PREPARED FOR
Alex & Jamie Bennett

PREPARED BY
Jordan Lee

ISSUED
7 October 2026

This scope records the proposed work to be priced. It is not a quotation, contract or final construction specification.

AREA 01 · PROPOSED WORKS

Kitchen

DIMENSIONS

Length 4.2 m

Width 3.6 m

Ceiling height 2.7 m

Floor area: 15.12 m² (length × width)

Proposed works

- Remove the existing cabinets, benchtops and splashback. Keep current layout.
- Replace all cabinetry with shaker doors in laminate finish, including the island bench.
- Replace benchtops with stone and install a tiled splashback.
- Install a stainless steel sink and mixer. Plumbing work includes disconnection and reconnection at existing locations.
- Replace the floor finish with tiles; retain existing appliances for reconnection.
- Electrical work includes downlights and pendants above the island.

To confirm

- Final cabinet colour, stone colour and tile selection before ordering.

SELECTIONS & SCOPE DETAILS

- Appliances: Keep existing
- Lighting: Downlights, Pendants

Kitchen – continued

REFERENCE PHOTO



Fig 1.1 – Kitchen — existing layout

AREA 02 · PROPOSED WORKS

Ensuite

DIMENSIONS

Length 3.0 m

Width 2.2 m

Ceiling height 2.7 m

Floor area: 6.60 m² (length × width)

Proposed works

- Strip out the existing vanity, shower screen and tiles; remove waste from site.
- Prepare the wet-area surfaces and renew waterproofing before tiling.
- Install tiles to the floor and full height wall tiling, with a shower niche.
- Fit a wall-hung vanity with stone top and a mirror cabinet.
- Install a single panel shower screen, rail shower and back-to-wall toilet. No bath.
- Replace tapware and install a Tastic. No underfloor heating or heated towel rail.

To confirm

- Final tapware finish, vanity width and tile selections.

SELECTIONS & SCOPE DETAILS

- Underfloor heating: Not included
- Heated towel rail: Not included

REFERENCE PHOTO

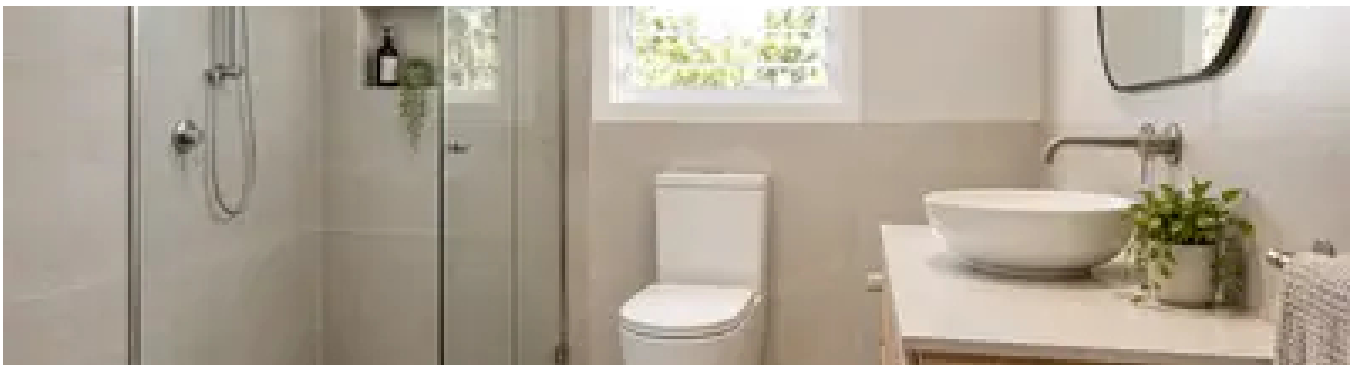


Fig 2.1 – Ensuite — current condition

AREA 03 · PROPOSED WORKS

Living Room

DIMENSIONS

Length 5.4 m

Width 4.2 m

Ceiling height 2.7 m

Floor area: 22.68 m² (length × width)

Proposed works

- Remove existing flooring and install hybrid flooring over the prepared floor.
- Prepare and repaint walls, ceiling, skirtings and architraves.
- Replace downlights in existing positions. Keep existing fireplace.
- Retain doors and windows; no feature wall work is included.

To confirm

- Flooring colour, wall colour and extent of floor preparation after lifting.

SELECTIONS & SCOPE DETAILS

- Painting required: Included
- Feature wall: None

REFERENCE PHOTO



Fig 3.1 – Living room — flooring area

AREA 04 · PROPOSED WORKS

Laundry

DIMENSIONS

Length 2.4 m

Width 1.8 m

Ceiling height 2.7 m

Floor area: 4.32 m² (length × width)

Proposed works

- Remove existing cabinetry and benchtop; retain washer and dryer.
- Replace all cabinetry with flat doors in laminate finish and a laminate benchtop.
- Install a stainless steel trough and mixer. Plumbing work includes reconnection at existing locations.
- Retain the side by side appliance arrangement and replace the floor with tiles.

To confirm

- Cabinet colour, tile selection and appliance clearances before manufacture.

REFERENCE PHOTO



Fig 4.1 – Laundry — existing fit-out

PROJECT-WIDE MATTERS

Project overview

Renovate the kitchen, ensuite, living room and laundry. Retain the existing room layouts. Protect the entry and retained finishes during the works. Clear driveway access is available.

CLIENT REVIEW · BEFORE QUOTATION

Is this what you want priced?

Please check that the areas and work described in this document match what you want included in the quotation. Advise the builder of any additions, removals or corrections before pricing begins.