



ADELAIDE HILLS / RENOVATION

Hills Residence

Kitchen, wet areas & living refurbishment

SITE

Adelaide Hills, South Australia

PREPARED BY

Gumleaf Ridge Building

DOCUMENT

Client Scope Report

ISSUED

October 2026

THE PROJECT

A clear view of the work.

A consolidated renovation scope covering the kitchen, ensuite, main bathroom, laundry, living areas and external interfaces. Each space is documented with photography, proposed works and decisions to close before construction.



01 KITCHEN	Joinery, surfaces, services and finishes
02 ENSUITE	Shower, vanity, waterproofing and fittings
03 MAIN BATHROOM	Bath, tiling, screens and fixtures
04 LAUNDRY	Joinery, plumbing and flooring
05 LIVING / DINING	Finishes, electrical and adjoining works
06 EXTERNAL	Thresholds, interfaces and access

ROOM 01 / WORK SCOPE

Kitchen

A renewed central kitchen with coordinated cabinetry, worktops, electrical and plumbing.



KITCHEN / SITE PHOTOGRAPHY

PROPOSED WORKS

- Remove selected existing joinery, appliances and finishes. Protect retained adjoining surfaces.
- Supply and install custom joinery, stone worktops and splashback finishes.
- Coordinate new appliance connections, power and lighting positions.

KEY DETAILS

ITEM	ALLOWANCE / INTENT
Joinery	Full-height bank, island, perimeter cabinets
Finishes	Stone top and selected splashback

BY OWNER


Appliances and loose accessories unless listed in the contract.

TO CONFIRM

Final joinery drawings, appliance dimensions and finish samples.

ROOM 02 + 03 / WET AREAS


Bathing spaces.

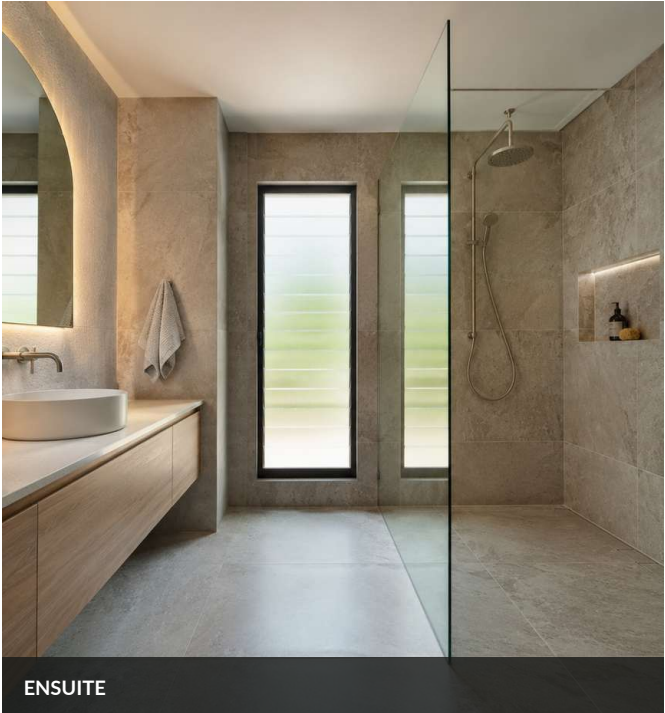

ENSUITE

ENSUITE / PROPOSED WORKS

- Retain existing window opening; confirm glazing and ventilation.
- Replace shower enclosure, screen, fittings and vanity.
- New waterproofing, wall tiling and compliant falls.

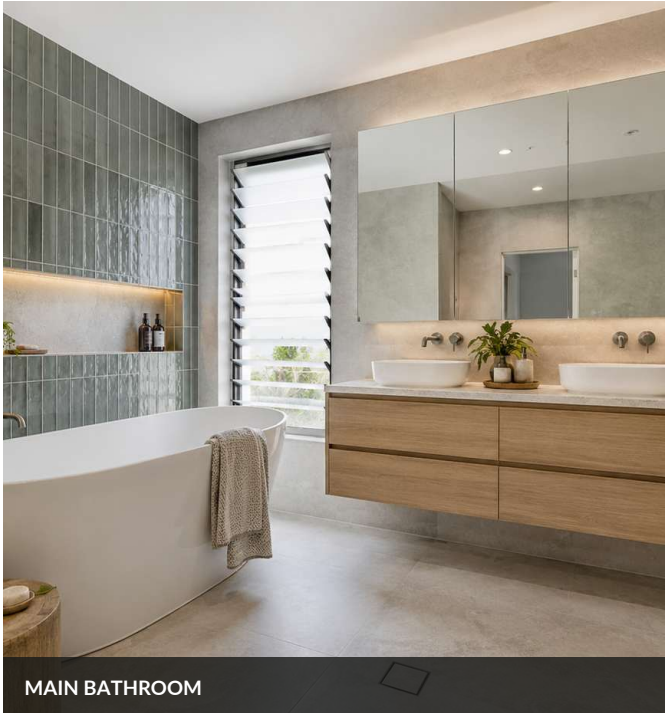

MAIN BATHROOM

MAIN BATHROOM / PROPOSED WORKS

- New freestanding bath and vanity joinery.
- Replace finishes and waterproofed wet-zone surfaces.
- Review floor waste, screen and fixture positions.

BY OWNER | Decorative accessories and loose furniture

TO CONFIRM | Tile selections, fixture schedule and set-outs

ROOM 04 / WORK SCOPE

Laundry

A practical laundry refurbishment with improved storage, durable wet-area finishes and services coordination.



LAUNDRY / SITE PHOTOGRAPHY

PROPOSED WORKS

- Replace base joinery and provide overhead storage where set-out allows.
- Provide new worktop, sink, tapware and tiled splashback.
- Coordinate washing machine provisions and floor finishes.

KEY DETAILS

ITEM	ALLOWANCE / INTENT
Cabinetry	Base and overhead storage
Benchtop	Durable low-maintenance surface

BY OWNER

Washing machine and dryer.

TO CONFIRM

Dryer mounting, appliance sizes and final cupboard layout.

ROOM 05 / WORK SCOPE

Living & dining

Retain the spacious connection to the garden while updating adjacent finishes and practical services.



LIVING & DINING / SITE PHOTOGRAPHY

PROPOSED WORKS

- Make good affected walls, ceilings, skirtings and architraves.
- Complete floor finish transitions adjoining the kitchen.
- Coordinate electrical adjustments and final painting to affected surfaces.

KEY DETAILS

ITEM	ALLOWANCE / INTENT
Flooring	Retain or extend nominated finish
Painting	Affected walls and trims

BY OWNER

Furniture, rugs and styling.

TO CONFIRM

Extent of floor replacement and paint colour schedule.

ROOM 06 / WORK SCOPE

External interfaces

Resolve access, glazing and threshold interfaces impacted by the internal renovation.



EXTERNAL INTERFACES / SITE PHOTOGRAPHY

PROPOSED WORKS

- Inspect door thresholds and drainage relationship to proposed floor levels.
- Protect existing external surfaces during the work.
- Allow for local making-good where disturbed by services or installation.

KEY DETAILS

ITEM	ALLOWANCE / INTENT
Openings	Existing doors retained
Thresholds	Check final floor heights

BY OWNER

Landscaping and outdoor furniture.

TO CONFIRM

Weatherproofing and drainage details before works.

SCOPE CONTROLS

Decisions that matter.

Clear inclusion boundaries and outstanding selections prevent small assumptions from becoming costly variations.

LOCATION	CURRENT SCOPE	STILL TO CONFIRM
Kitchen joinery	Custom cabinetry	Final cabinet drawings and hardware
Kitchen appliances	Owner selection	Sizes, model numbers and services
Ensuite tiling	Full-height shower zone	Tile sizes, finishes and trims
Bathroom fittings	Brushed finish allowance	Final tapware and bath selection
Laundry storage	Base and overhead cabinetry	Internal fit-out and door profiles
Flooring	Engineered timber / tile interfaces	Transitions, thickness and set-downs

BY OWNER

- Loose furniture, styling and window furnishings unless separately specified.
- Final selection approvals prior to procurement.

TO CONFIRM BEFORE CONTRACT

- Site verification of all critical measurements and services.
- Structural and waterproofing details where existing construction is concealed.
- The final inclusion schedule, finishes and trade responsibility matrix.

SITE PHOTOGRAPHY

Captured room by room.



01 KITCHEN



02 ENSUITE



03 BATHROOM



04 LAUNDRY



05 LIVING



06 EXTERNAL

READY FOR THE NEXT STAGE

From site visit to scope.

With the site record captured, the remaining job is to confirm selections and dimensions, price the agreed works and issue the right document to the right audience.



HILLS RESIDENCE / EXTERNAL VIEW

- 01** **VERIFY** Confirm critical dimensions, services and concealed conditions.
- 02** **FINALISE** Lock the selection schedule and by-owner responsibilities.
- 03** **ISSUE** Use the completed scope as the basis for quoting and delivery.