



ADELAIDE HILLS / RENOVATION

Hills Residence

Kitchen, wet areas & living refurbishment

SITE

Adelaide Hills, South Australia

PREPARED BY

Gumleaf Ridge Building

DOCUMENT

Internal Site & Estimating Report

ISSUED

October 2026

SITE / ESTIMATING

Inspection brief.

Working document for estimating, trade consultation and construction planning. Record assumptions now; verify concealed conditions before quantities and allowances are locked.



KITCHEN / CAPTURED CONDITION

PRIORITY	OBSERVATION	ACTION
High	Services not fully exposed	Confirm electrical capacity and circuit routing
High	Waterproofing behind finishes	Scope new membranes and floor falls
Medium	Wall / ceiling substrates	Check after strip-out and allow patching
Medium	Joinery final dimensions	Confirm site set-out prior to fabrication
Medium	Floor levels and transitions	Check finished floor levels and thresholds

ESTIMATING RULE

Measured quantities in this report are preliminary and are not construction-grade dimensions. Final material orders, cabinetry drawings and site set-outs require verification.

ESTIMATING / FIELD RECORD

Kitchen / estimating



KITCHEN / ESTIMATING


ELEMENT	FIELD QUANTITY / STATUS	ESTIMATING NOTE
Perimeter joinery	Approx. 6.2 lm	Site measure for shop drawings
Island	Approx. 3.0 × 1.1 m	Set-out, services and overhang
Splashback	Approx. 4.8 m ²	Confirm format and opening deductions
Electrical	Rework required	Appliance and lighting schedule
Plumbing	Sink and dishwasher	Confirm drain/point positions

TRADE COORDINATION / CHECKS

- Confirm any structural changes before removing existing cabinetry.
- Check switchboard capacity if induction and ovens are upgraded.
- Confirm edge profiles, hardware and appliance integration with joiner.

ESTIMATING / FIELD RECORD

Ensuite / estimating

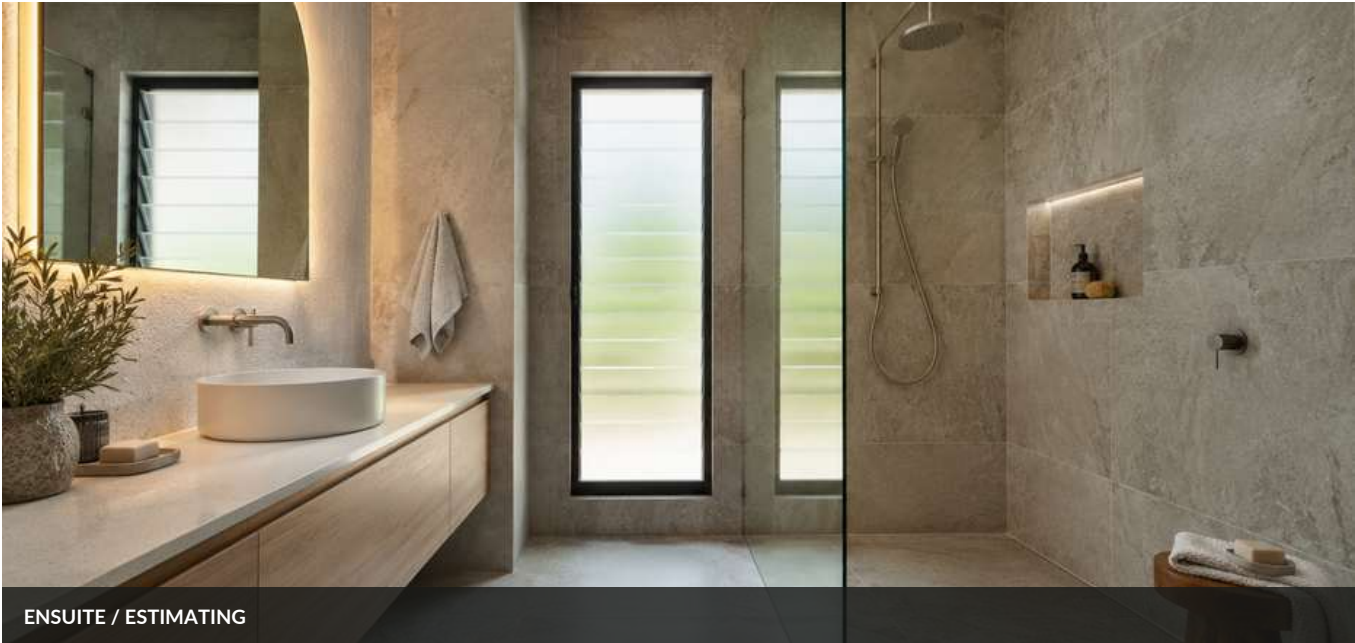

ELEMENT	FIELD QUANTITY / STATUS	ESTIMATING NOTE
Floor tiling	Approx. 6.0 m ²	Allow waste and falls
Wall tiling	Approx. 23 m ²	Full-height wet area extent
Shower screen	Approx. 1.1 m wide	Site measure after tiling
Vanity	Approx. 1.5 m	Confirm plumbing offsets
Waterproofing	Full wet area	Floor waste and penetration details

TRADE COORDINATION / CHECKS

- Inspect moisture and substrate condition during strip-out.
- Confirm shower fall, grate position and door swing.
- Coordinate waterproofing inspection before tiling.

ESTIMATING / FIELD RECORD

Main bathroom / estimating



MAIN BATHROOM / ESTIMATING

ELEMENT	FIELD QUANTITY / STATUS	ESTIMATING NOTE
Floor tiling	Approx. 8.1 m ²	Confirm waste factor
Wall tiling	Approx. 28 m ²	Feature wall decision pending
Bath	Freestanding	Confirm spout and clearances
Vanity	Approx. 1.8 m	Confirm mirror, taps and lighting
Shower	Screen and fittings	Waterproofed zones and access

TRADE COORDINATION / CHECKS

- Confirm bath weights and available plumbing zones.
- Check existing exhaust and ventilation requirements.
- Verify joinery and screen dimensions after linings.

ESTIMATING / FIELD RECORD

Laundry / estimating



LAUNDRY / ESTIMATING

ELEMENT	FIELD QUANTITY / STATUS	ESTIMATING NOTE
Joinery	Approx. 3.7 lm	Verify depth and appliance clearance
Splashback	Approx. 2.7 m ²	Tile selection outstanding
Floor tiles	Approx. 10 m ²	Confirm finish and threshold
Power	Appliance + general	RCD, GPOs and ventilation

TRADE COORDINATION / CHECKS

- Check washer/dryer ventilation and access.
- Confirm laundry taps and discharge locations.
- Record finished floor-level interface at external door.

ESTIMATING / FIELD RECORD

Living & external / estimating



LIVING & EXTERNAL / ESTIMATING

ELEMENT	FIELD QUANTITY / STATUS	ESTIMATING NOTE
Floor interface	Approx. 24 m ² affected	Extent subject to confirmation
Painting	Affected areas	Repair and colour match
Electrical	Lighting / switches	Confirm points against reflected plan
External making-good	Provisional	Confirm affected thresholds and weather seals

TRADE COORDINATION / CHECKS

- Verify condition of adjacent flooring before demolition.
- Check temporary weatherproofing and dust control.
- Allow for access, skip placement and occupied-home staging.

ESTIMATOR CHECKLIST

Trades & sequencing.

PACKAGE	AREAS	ALLOWANCE / CHECK
Demolition	Kitchen, wet areas and laundry	Protect retained finishes; isolate services
Carpentry	Substrates, framing and trims	Confirm concealment and structural requirements
Plumbing	Kitchen, vanity, laundry and wet areas	Pressure and waste checks before close-up
Electrical	Appliance, lighting and power changes	Circuits, switchboard and compliance
Waterproofing	Ensuite, bath and laundry	Certificates, falls and penetrations
Tiling	Wet area walls/floors and thresholds	Set-out, cut schedule, feature details
Cabinetry	Kitchen, wet area vanities, laundry	Site measure and coordinated shop drawings
Painting	Affected walls, ceilings and trims	Make-good after other trades
Glazing	Screens and any glazing adjustments	Site measure after finishes

UNRESOLVED HOLD POINTS

- Confirm final electrical and plumbing service positions before joinery manufacture.
- Resolve waterproofing extents and any hidden defects after demolition.
- Confirm site access, material storage and waste management.

SCOPE CONTROLS

Decisions that matter.

Clear inclusion boundaries and outstanding selections prevent small assumptions from becoming costly variations.

LOCATION	CURRENT SCOPE	STILL TO CONFIRM
Kitchen joinery	Custom cabinetry	Final cabinet drawings and hardware
Kitchen appliances	Owner selection	Sizes, model numbers and services
Ensuite tiling	Full-height shower zone	Tile sizes, finishes and trims
Bathroom fittings	Brushed finish allowance	Final tapware and bath selection
Laundry storage	Base and overhead cabinetry	Internal fit-out and door profiles
Flooring	Engineered timber / tile interfaces	Transitions, thickness and set-downs

BY OWNER

- Loose furniture, styling and window furnishings unless separately specified.
- Final selection approvals prior to procurement.

TO CONFIRM BEFORE CONTRACT

- Site verification of all critical measurements and services.
- Structural and waterproofing details where existing construction is concealed.
- The final inclusion schedule, finishes and trade responsibility matrix.

SITE PHOTOGRAPHY

Captured room by room.



01 KITCHEN



02 ENSUITE



03 BATHROOM



04 LAUNDRY



05 LIVING



06 EXTERNAL

READY FOR THE NEXT STAGE

From site visit to scope.

With the site record captured, the remaining job is to confirm selections and dimensions, price the agreed works and issue the right document to the right audience.



HILLS RESIDENCE / EXTERNAL VIEW

- 01** **VERIFY** Confirm critical dimensions, services and concealed conditions.
- 02** **FINALISE** Lock the selection schedule and by-owner responsibilities.
- 03** **ISSUE** Use the completed scope as the basis for quoting and delivery.